


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 33 TOWNSHIP 16 RANGE 4
DATE: 10-29-08
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Set Harrison
METHOD OF ESTABLISHMENT: County: 1-14-04

IN. S.P.C. E ZONE NAD '83
NAME: 16043302
N: 504974.2970(m)
E: 63500.8020(m)

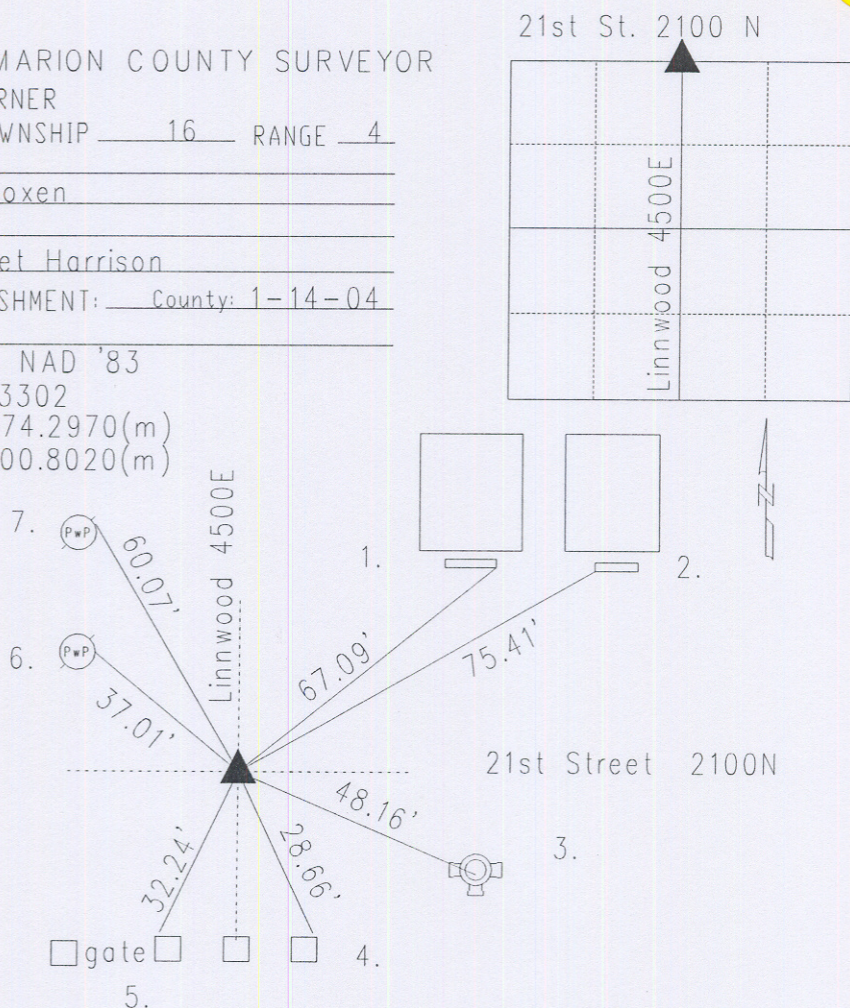

CORNER HISTORY: Original post set 1820 by Laughlin with witness: 30" beech S 75 W 19 links; 28" dogwood S 70 E 41 links per Marion County Atlas pg. 11. Reference dated 5-13-58 by Monroe called cut 'x' in brick pavement. Reference dated 2-6-70 by SeFranka called brass plug. Reference dated 3-16-76 by Wilcoxon called brass disc. Reference dated 11-30-87 by Gries called Brass plug. Reference dated 9-17-92 by Kiste called brass plug. Reference 8-23-97 by Wilcoxon called small pk nail set in concrete. Reference dated 1-14-04 by Wilcoxon called same. Reference dated 10-29-08 by Wilcoxon set Harrison by ties and GPS, no other points were found.

16043302

REF.	DISTANCE	DESCRIPTION
1.	67.09'	SF corner of porch foundation Address 4502
2.	75.41'	SW corner of porch foundation Address 4504
3.	48.16'	Top nut of fire hydrant
4.	28.66'	NF corner of brick column by steel post
5.	32.24'	NW corner of brick column : gate
6.	37.01'	Mag nail NE PwP#23-472A 12"up
7.	60.07'	Mag nail E PwP#23-472A 12"up